


# ENVIROFAN

## Ceiling Fan Dimensions

FEATURE	MODEL NUMBER								
	PLATINUM LINE	GOLD LINE	GOLD LINE	GOLD LINE	SILVER LINE	SILVER LINE	SILVER LINE	SILVER LINE	BRONZE LINE
	190A	160F	160C	136F	60F	60C	48F	48C	FP56
A. Safety Cable (6)	n/a	13"	13"	7"	13"	13"	13"	13"	13"
B. Cord/Lead Wires (1) (2)	16"	16"	20"	20"	20"	20"	20"	20"	20"
C. Top Canopy	5 3/4"	4 3/8"	4 3/8"	4 3/8"	4 3/8"	4 3/8"	4 3/8"	4 3/8"	4 3/8"
D. Top to Bottom Length	19"	18 3/4"	18 3/4"	15"	18 3/4"	18 3/4"	18 3/4"	18 3/4"	17 1/2"
E. Downrod Length (4)	10"	10"	10"	8"	10"	10"	10"	10"	10"
E. Downrod Diameter	1"	1"	1"	1"	3/4"	3/4"	3/4"	3/4"	3/4"
F. Bottom Canopy	4 3/8"	4 3/8"	4 3/8"	4 3/8"	4 1/8"	4 1/8"	4 1/8"	4 1/8"	4 1/8"
G. Depth of Motor Housing	3 1/2"	3"	3"	3"	3"	3"	3"	3"	3"
H. Width of Motor Housing	8"	8"	8"	7"	8"	8"	8"	8"	8"
I. Blade Length (3) (4) (5)	26"	23 3/4"	23 3/4"	15"	23 3/4"	23 3/4"	20 1/2"	20 1/2"	23 3/4"
J. Diameter/Sweep	60"	56"	56"	36"	56"	56"	48"	48"	56"

- (1) Cords/Lead Wires/Safety Cables measured from top of downrod.
- (2) Models 190A and 160F feature cord and plug. All other models have wire leads.
- (3) Models 60C, 48C and 160C feature straight blades. All other models have curved tip blades.
- (4) Model 190A also available with 18" downrod and/or straight blades (56" diameter).
- (5) Blade bracket included in measured length.
- (6) Safety Cable standard on all models except Model 190A.

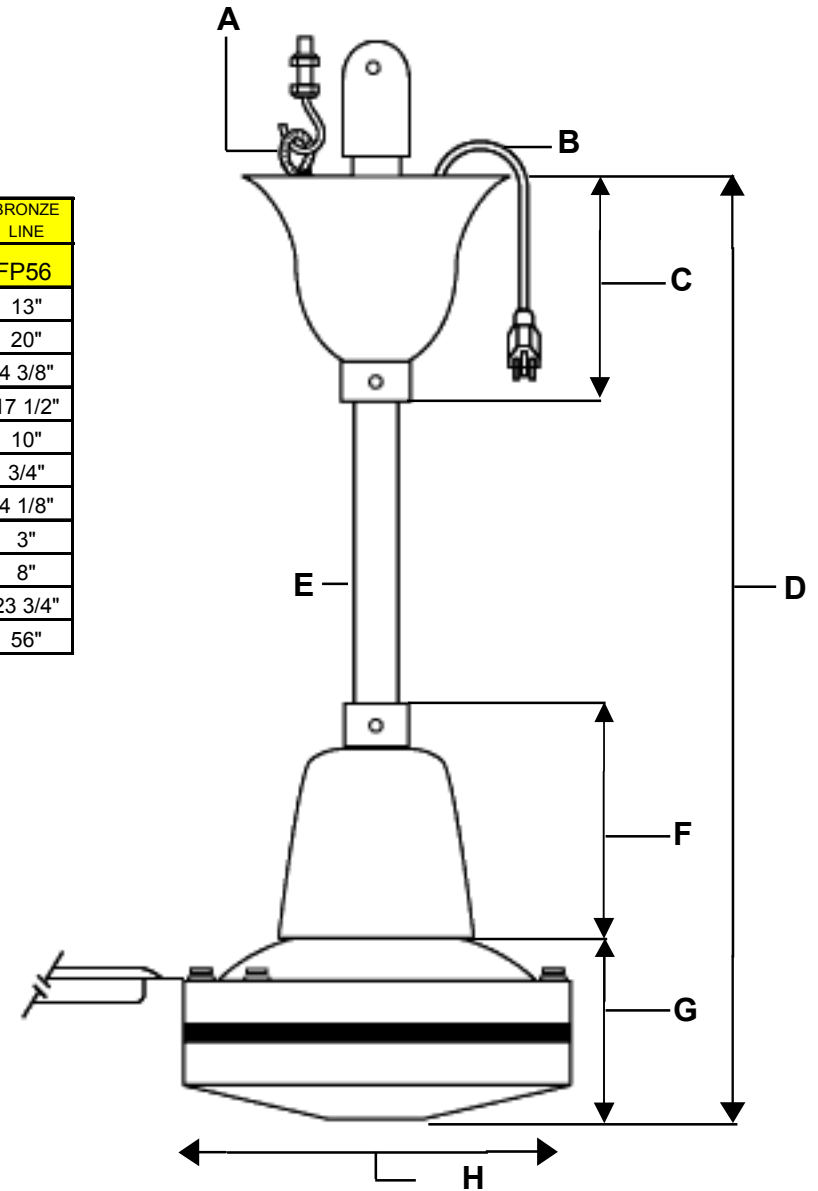

**Note:** Specifications subject to change without notice due to product change or improvement.

**Caution:** Fan blades should not be mounted lower than 10 feet above the floor.



**Northwest Envirofan**

Division of Northwest Environmental Systems, Inc.

Envirofan and Agrifan Ceiling Fans • Protecto-Guard Ceiling Fan Guards • Fan Controls

800-236-7080

(920) 235-7808

FAX (920) 235-3049